



S18 Countertop Faucet Replacement

Ensure that the dispenser is powered off and unplugged, the water and Co2 are, turned off, and all taps are de-pressurized. This ensures that you can safely work on all components of the Dispenser.

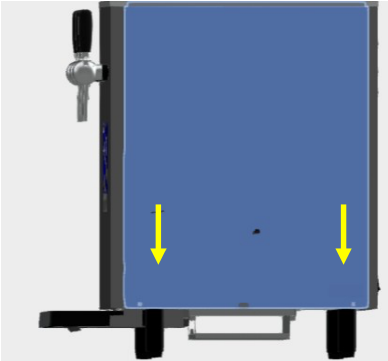


1. Remove two right side panel screws and lift panel off.

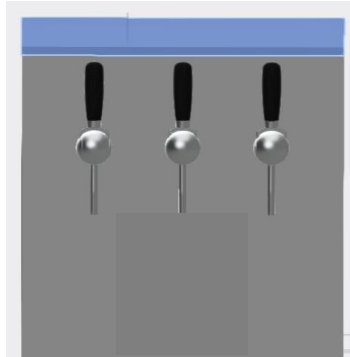


2. Remove dispenser top by lifting up on the front. Remove ground wires underneath lid on back left.



3. Remove Overflow Tube by holding collar to fitting and pulling down on the tube.

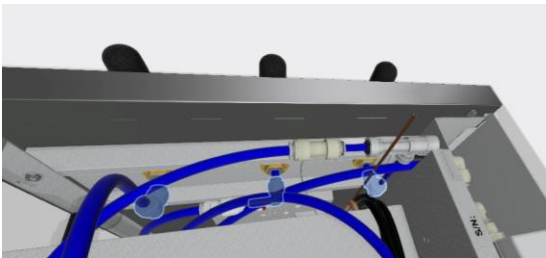



4. Disconnect the John Guest fitting from desired faucet(s).

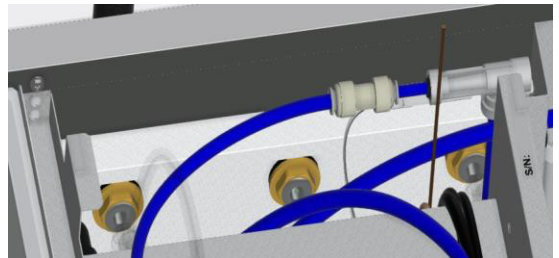

5. Using a wrench, loosen the Hexnut for the desired faucet(s).



7. Secure hand on faucet(s) to be replaced and remove hex nut and o-ring from the inside. Replace faucet and hand tighten hex nut and o-ring.



8. Using a wrench, tighten hex nut securely and re-connect tubing at the desired faucet(s). Secure the side panel with screws and fit lid securely on top.