



S18 Countertop

1.3bar Regulator Replacement


Ensure that the dispenser is powered off and unplugged, the water and CO2 are turned off, and all taps are de-pressurized. This ensures that you can safely work on all components of the Dispenser.

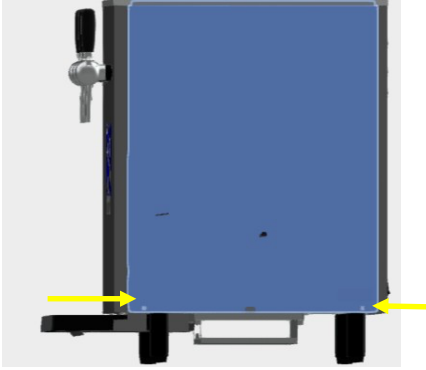


1. Remove two right side panel screws and lift panel off.

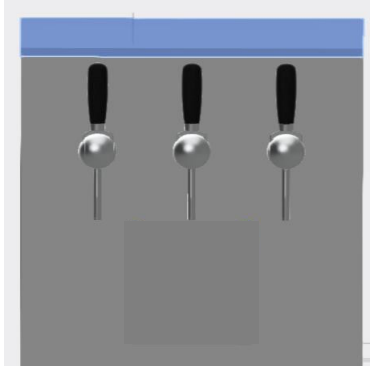


2. Remove dispenser top by lifting up on the front. Remove ground wires underneath lid on back left.

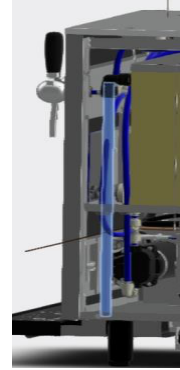


3. Remove Overflow Tube by holding collar to fitting and pulling down on the tube.

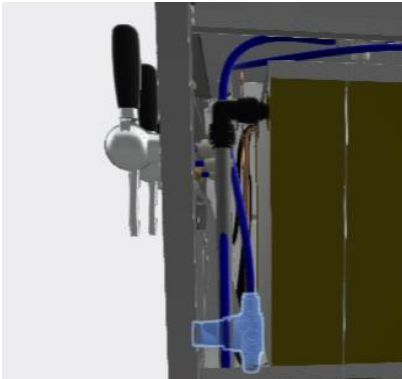


4. The regulator is behind the front plate with access from the side.

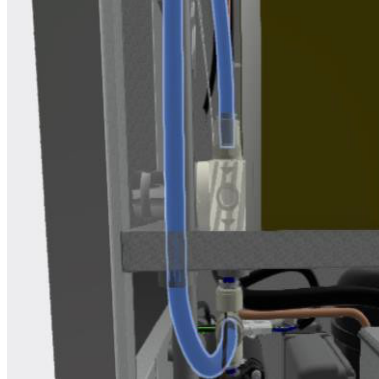


5. Remove both blue poly tubes from the regulator.

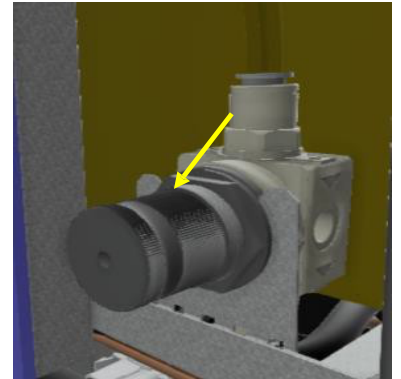

5. Loosen hex nut that secures regulator to the bracket to successfully replace with new regulator and secure to bracket

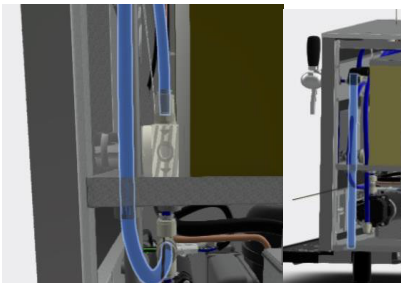

8. Connect both blue poly tubing to the regulator. Re-connect overflow tube.



8. Secure the side panel with screws and fit lid securely on top.

